



Electromagnetic Field Measurement Survey



BS Number: 12

Site Name: Showground

Site Address:

Across Fairground Office Park

Off Samore Machel Drive

Gaborone

Site visit date: 25 October 2010

Site report date: 01 December 2010

Introduction

As part of an electromagnetic measurement survey program of base station installations performed by the Botswana Telecommunications Authority (BTA), measurements were performed at Showground. The aim of the survey was to measure the electromagnetic exposure levels at various positions around the base station.

Measured results are compared to the guidelines of limiting exposure proposed by the International Commission on Non-Ionizing Radiation Protection (ICNIRP).

Measured Results

Table 1 and Figure 1 presents the measured positions and exposure levels in terms of a percentage of the ICNIRP guidelines, where a 100% value would indicate that the safe exposure limit for the General Public has been reached. The total exposure is given in the first column of the table. Since the aim of the survey was to measure the typical exposure values, the reported results are un-extrapolated peak field instantaneous exposure results, at the specific date and time of the measurement survey.

Summary of Results & Conclusion

For the measured results presented in this report a 100% value would indicate that the ICNIRP exposure limit for the General Public has been reached. The highest value measured is 0.0949% of the ICNIRP General Public guidelines and was obtained at position 7. This is more than 1050 times below the General Public limit.

Table 1: RF Exposure Levels at Measurement Positions

Measured On	No.	Position	Total Exposure	GSM900 DL	GSM1800 DL	UMTS DL	Others
2010/10/25 08:33	1	At the base of the Showground mast.	0.0451%	0.0429%	0.0014%	0.0001%	0.0008%
2010/10/25 08:42	2	Directly across the road from the Showgrounds mast, next to a substation. On the sidewalk along the road leading past the Showgrounds site.	0.0193%	0.0130%	0.0011%	0.0008%	0.0044%
2010/10/25 08:47	3	About 30 meters from the Fairgrounds Business Park, on the sidewalk along the road leading past the Showground mast. In front of empty plot.	0.0252%	0.0223%	0.0006%	0.0013%	0.0010%
2010/10/25 08:54	4	Approximately 15 meters from the entrance of the Fairgrounds Business park. On the sidewalk alongside the road leading past the Showgrounds mast.	0.0143%	0.0112%	0.0005%	0.0012%	0.0014%
2010/10/25 09:09	5	On a rocky outcrop in the parking area just beyond the North Gate entrance of the Fairgrounds Holdings premises.	0.0596%	0.0579%	0.0006%	0.0002%	0.0009%
2010/10/25 09:14	6	Towards a warehouse building. On the pavement of the parking area just past the North Gate of Fairgrounds Holdings.	0.0758%	0.0743%	0.0002%	0.0005%	0.0008%
2010/10/25 09:18	7	In the parking area just beyond the North Gate of Fairgrounds Holdings. Next to the fence of the Stanbic parking area.	0.0949%	0.0918%	0.0011%	0.0013%	0.0008%
2010/10/25 09:22	8	Next to parking area just beyond the North Gate of Fairground Holdings. Close to the corner of the fence of the Stanbic fence and next a barbed wire fence.	0.0637%	0.0622%	0.0003%	0.0005%	0.0008%
2010/10/25 10:00	9	In the parking area in front of the Stanbic branch along the road leading past the Showground site.	0.0530%	0.0482%	0.0010%	0.0029%	0.0009%

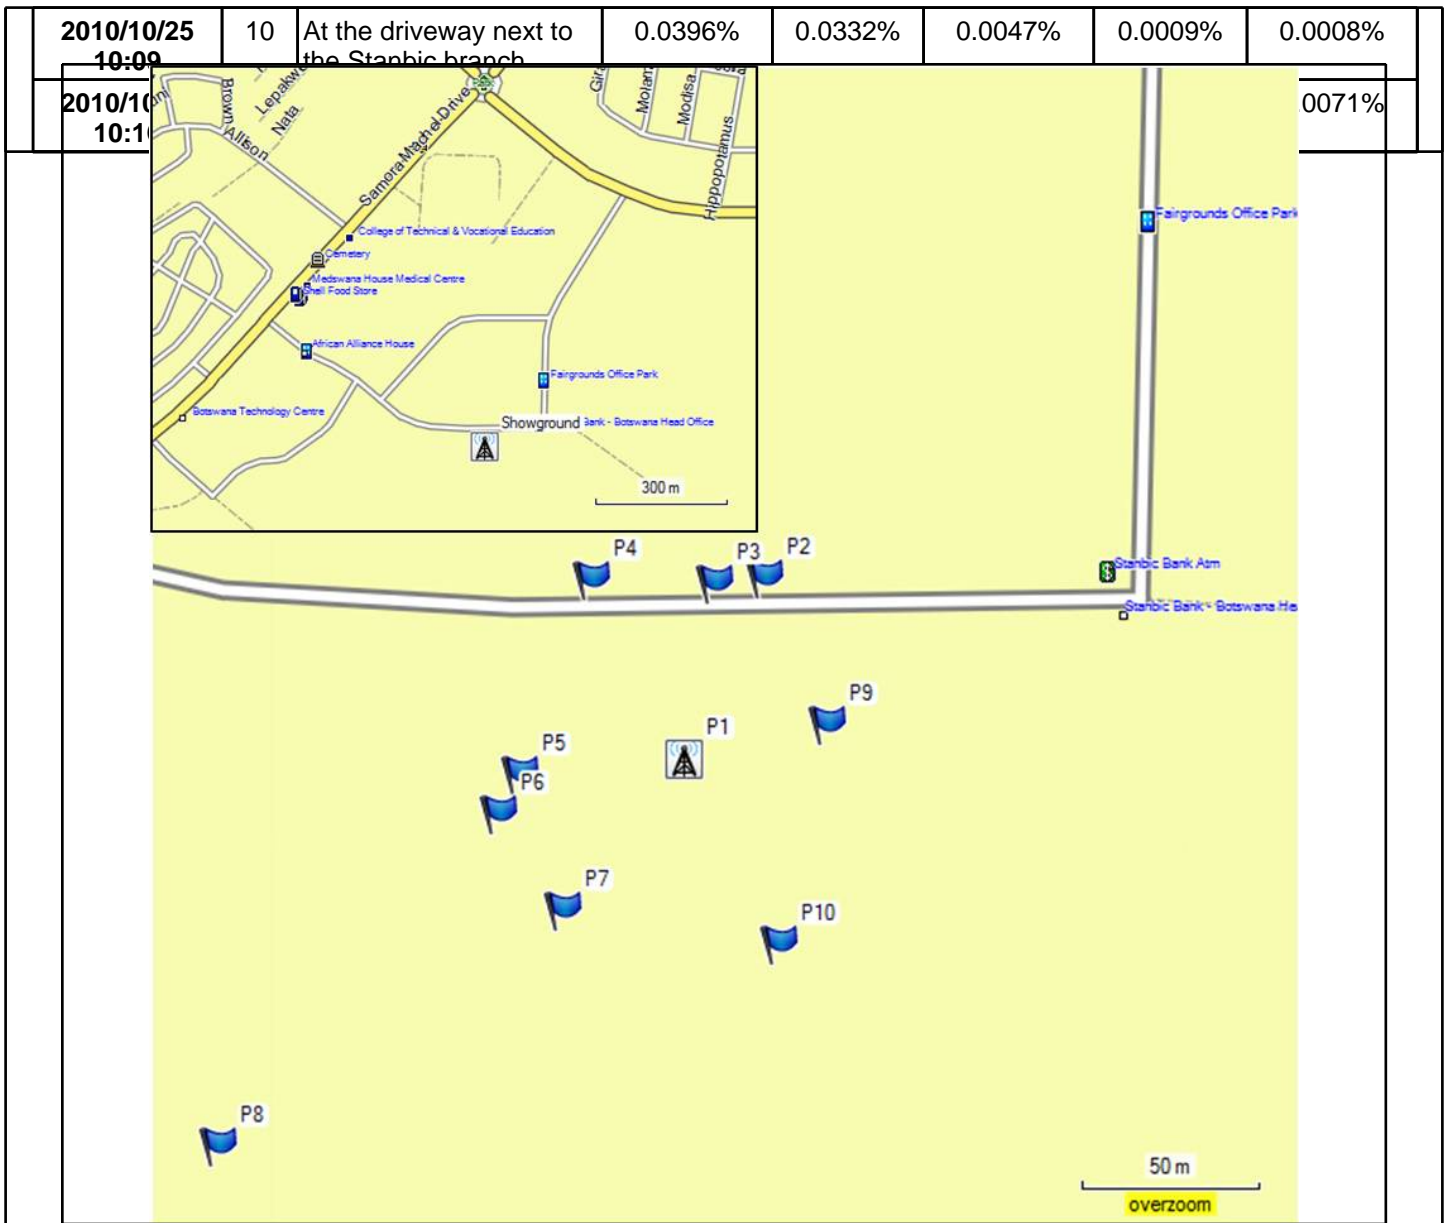


Figure 1: Map of Area around Base Station Site and Measurement Positions

Measurement Equipment and Methodology

Both survey meter and probe must be calibrated on a regular basis. The calibration status is presented in the following table.

Survey Meter:	Narda SRM 3006 Selective Radiation Meter, S/N: D-0016	Calibration Status:	Valid calibration: 12 July 2010
Probe:	Narda BN 3501 Three-Axis E-Field Probe, S/N: K-0195	Calibration Status:	Valid calibration: 24 June 2010

Assessment Process and Software

The assessment process, software and training were developed by EMSS Consulting (EMSS). EMSS has expertise in the field of human exposure assessment to radio-frequency fields.

BTA engineers were trained by EMSS to perform measurements in accordance with the measurement protocol of the CENELEC 50492 (November 2008) standard for the in-situ measurement of electromagnetic field strength related to human exposure in the vicinity of base stations. The CENELEC 50492 standard requires an uncertainty assessment to be performed when extrapolation is not used to address maximum traffic. A full uncertainty analysis for the measurement methodology developed by EMSS has been performed and resulted in an expanded uncertainty of 3.8 decibel (dB).

Additional survey information, typically shown in a CENELEC 50492 report, is available from BTA on request.

For more information, contact the BTA at:

Tel: +267 395 7755

Fax: +267 395 7976

Email: engineering@bta.org.bw